



Exit & Emergency Architectural Emergency Light



PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Architectural Emergency Light
CATALOG NUMBER	
APPROVED BY	

SPECIFICATIONS

Construction:

Decorative, low-profile, architectural design
Mirror-bright reflector and prismatic polycarbonate refractor
Die-cast aluminum housing
Durable powder-coated finish
Sealed and gasketed

Electrical:

120/277 VAC Dual Rated
Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing
4.8V long-life, maintenance-free, rechargeable NiCd battery
Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
Photocell sensor included as a standard
Field-selectable 3500K/4000K/5000K CCT
0-10 V Dimming

Temperatures:

Min Start: -20°C Max: 40°C

Installation:

Surface mount via easy connect back plate that fits most standard size junction boxes
Universal K/O pattern on back plate for wall mount

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations
DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities.

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.


Warranty:

Five-year limited warranty



DIMENSIONS

Weight: 3.22 lbs.

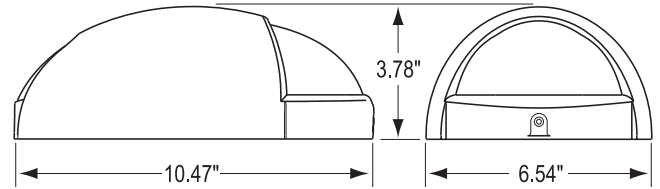

DLC PRODUCT INFORMATION

UNIT	DLC PRODUCT ID	CLASSIFICATION
ERD12BZ	S-WGJ858	Premium

ORDERING INFORMATION

CATALOG #	DESCRIPTION	FINISH	VOLTS
ERD12BZ	Architectural LED Emergency Light w/ Photocell	Bronze	120/277

PERFORMANCE DATA

UNIT	SELECTABLE 3500K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE
	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
ERD12BZ	1,740	130	1,814	138	1,775	133	15