



## Origin Series Selectable Wrap

### PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Selectable Wrap
CATALOG NUMBER	
APPROVED BY	

### SPECIFICATIONS

**Construction:**

Cold-rolled steel metal 22 gauge  
 Toolless lens install to save installation time  
 Post-painted for high quality finish

**Lens:**

Diffuse polycarbonate cover lens for impact resistance

**Electrical:**

AC Input: 120-277VAC 50/60Hz  
 Driver: Constant current, Class 2  
 Dimming 0-10V  
 Temperatures: Min Start: -20°C Max: 40°C

**LEDs:**

Long-life LEDs provide 50,000 hours of operation with at least 70% of initial output (L70).  
 CCT Selectable: 3500K, 4000K, 5000K

**Listings:**

Luminaire is certified to UL/cUL Standards for Damp Locations.

**Testing:**

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.


**Warranty:**

Five-year limited warranty



### DIMENSIONS

Weight: 4.9 lbs

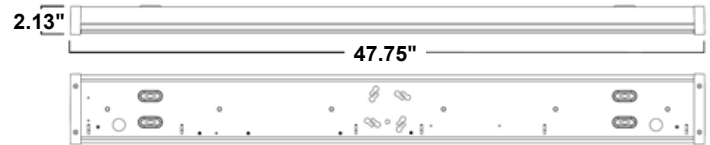

<sup>1</sup>LED Life Span Based Upon LM-70 Test Results



**Origin Series**  
Selectable Wrap

**ORDERING INFORMATION**

ORW	S	4	3-5L		
PRODUCT SERIES	SELECTABLE	FIXTURE LENGTH	LUMEN PACKAGE	COLOR TEMP.	CONTROLS
ORW = Wrap	S = Selectable	4 = 4 Feet	3-5L = 3,000 - 5,000 Lumens Selectable	blank = Selectable 3500K, 4000K, 5000K	Blank = Dimming (0-10V)

**PERFORMANCE DATA**

UNIT	CRI	3500K CCT		4000K CCT		5000K CCT		WATTAGE
		DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
3-5L	80	2,539	127	2,712	138	2,577	129	20
		3,799	125	4,057	135	3,856	127	30
		4,937	121	5,272	131	5,010	123	40

**DLC PRODUCT INFORMATION**

UNIT	DLC PRODUCT ID	CLASSIFICATION
ORWS43-5L	S-L6RCLL	Standard