



Selectable Dusk to Dawn Security Light

PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Selectable Dusk to Dawn
CATALOG NUMBER	DDS3-8L
APPROVED BY	

SPECIFICATIONS

Construction:

Durable die-cast aluminum housing with powder coated gray finish. The housing is designed for greater heat dissipation which allows for lower operating temperatures which results in a brighter light, more stable color and longer LED and driver life.

Lens:

UV stable polycarbonate lens designed to provide high efficiency, greater footcandles and a large pattern.

Glare Free:

Positioning of the LEDs results in the light being directed to desire locations eliminating glare and offensive light.

Electrical:

Constant current, Class 2, 120-277 VAC, 50-60 Hz

Off-State Power: 0 Watts

LEDs:

Atlas LEDs provide higher lumen output, greater energy efficiency and more reliable fixture performance.

Delivers 70% or greater of initial lumens at 50,000 hours¹

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations

DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities.

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Mounting:

Suitable for pole or wall mount application, 1 5/8" diameter mounting arm. Mounting arm sold separately.

Photocontrol:

Built in photocontrol



Warranty:

Five-year limited warranty



DIMENSIONS

Weight: 5.7 lbs.

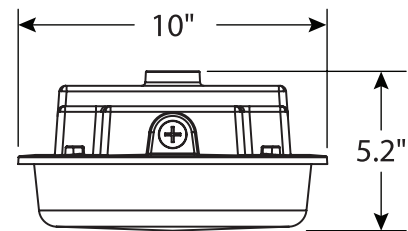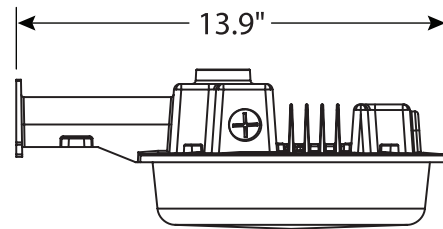

PERFORMANCE DATA

UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	BUG RATING	REPLACES UP TO
		DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)			
DDS3-8L	70	2,412	134	2,772	154	2,502	139	18	B3-U4-G2	175W MV
		4,690	134	5,390	154	4,865	139	35		
		7,451	134	8,236	154	7,726	139	56		

DLC PRODUCT INFORMATION

UNIT	5000K CCT	
	DLC PRODUCT ID	CLASSIFICATION
DDS3-8L	S-SW46GV	Premium

¹LED Life Span Based Upon LM-80 Test Results

Rebates and Incentives are available in many areas. Contact an Atlas Representative for more information.

Atlas Lighting Products, Inc.

PO Box 2348 | Burlington, NC 27216

800-849-8485 | fax: 1-855-847-2794 | www.atlasled.com